




**Features**

- Uses ferrite core with small size and high performance
- Wide range Lineup (3 to 30A)

**Applications**

- Suppressing conduction noise of power line and signal line
- Office automation equipment, inverter
- For CISPR, VCCI standards

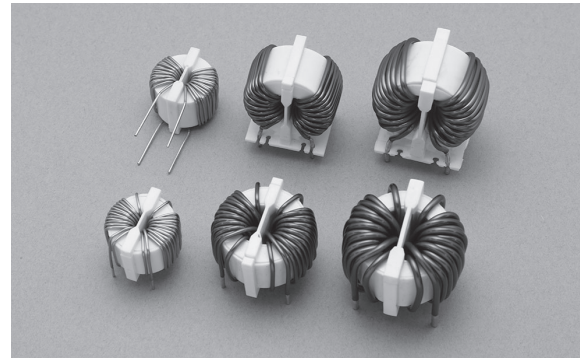









**Dimensions**

RCV SERIES (Vertical type)

RCH SERIES (Horizontal type)

N Type

P Type



( ):Reference value

Unit: mm

**Electrical Specifications**

Rated Voltage **250Vac**

Model Number	Rated Current (A)	Inductance Value min. (mH)	DC Resistance max. (mΩ)	Dimensions (mm)*					Wire dia. (φ mm)	Temperature Rise max.	Operating Temperature (°C)	Weight typ.(g)
				A max.	B max.	C max.	D	E				
RCV103-10N	3	1.0	70	17	17	15	7	11	0.6	40K	-25~+65 105°C with Temp. rise	6
RCV105-10N	5		55	25	24	19	10	16	0.8	50K	-25~+55 105°C with Temp. rise	18
RCV105-20N			2.0									
RCV110-10N	10	1.0	25	34	34	23	16	20	1.3	55K	-25~+75 130°C with Temp. rise	42
RCV110-10P					35		18	16				
RCV115-07N	15	0.7	9	34	27	16	20	1.5	55K	-25~+75 130°C with Temp. rise	38	
RCV115-07P						35	18					16
RCV115-16N		1.6	15	37	37	27	23	25	1.7	60K	-25~+70 130°C with Temp. rise	70
RCV115-16P							38	20				
RCV120-12N	20	1.2	14	39	29	39	25	2.0	60K	-25~+70 130°C with Temp. rise	70	
RCV120-12P						40	20					22
RCV125-07N	25	0.7	7	41	30	41	25	2.3	55K	-25~+75 130°C with Temp. rise	72	
RCV125-07P						42	12					22
RCV130-06N	30	0.6	5	65	65	40	25	35	3.2	40K	-25~+90 130°C with Temp. rise	210
RCH203-10N	3	1.0	70	17	17	15	11	12	0.6	40K	-25~+65 105°C with Temp. rise	6
RCH205-10N	5		55	25	24	19	12	18	0.8	50K	-25~+55 105°C with Temp. rise	18
RCH205-20N			2.0									
RCH210-10N	10	1.0	25	34	34	23	21	22	1.3	55K	-25~+75 130°C with Temp. rise	41
RCH215-07N	15	0.7	10						37			27
RCH215-16N		1.6	15	37	37	27	1.7	61				
RCH220-12N	20	1.2	14	39	39	29	23	25	2.0	60K	-25~+70 130°C with Temp. rise	70
RCH225-07N	25	0.7	7	41	41	30			2.3	72		
RCH230-06N	30	0.6	5	65	65	40	18	28	3.2	40K	-25~+90 130°C with Temp. rise	205