





特性

- 三相电源用线路滤波器
 - 三相3线线路滤波器 (DR3)
 - 三相4线线路滤波器 (DR4)
- 宽频带高衰减

用途

- 电波暗室、屏蔽室

●外形尺寸

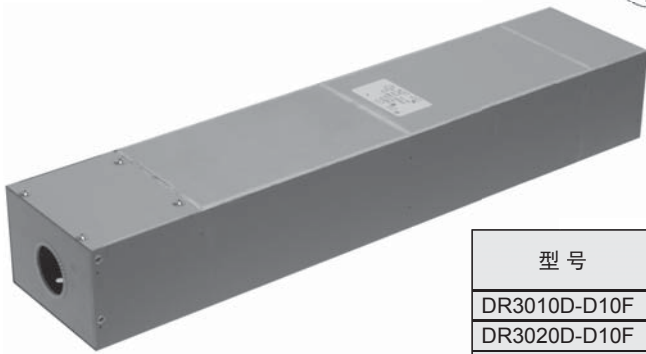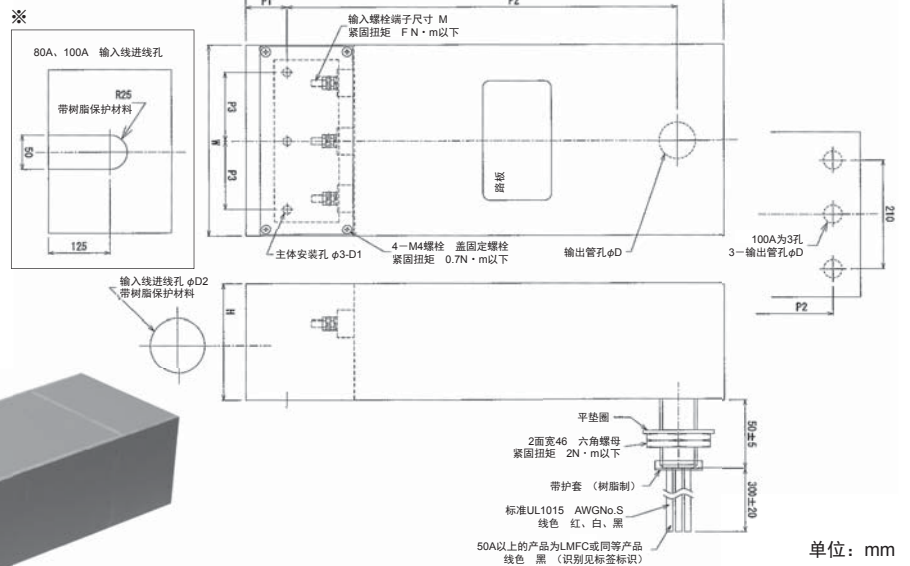

型号	外形尺寸 (mm)										
	L	W	H	P1	P2	P3	φD	φD1	φD2	M	S(mm ²)
DR3010D-D10F	400	140	85	30	335	50	27	6	40	M5	12(3.5)
DR3020D-D10F	400	140	85	30	335	50	27	6	40	M5	12(3.5)
DR3030D-D10F	400	140	85	30	335	50	27	6	40	M5	10(5.5)
DR3050D-D10F	450	170	120	30	385	65	27	6	40	M6	6(13.5)
DR3060D-D10F	450	170	120	30	385	65	27	6	40	M6	6(13.5)
DR3100D-D10F	760	300	250	25	685	110	27×3	6	※	M8	(38.0)
DR4020D-D10F	500	230	110	25	445	85	27	6	-	M5	12(3.5)
DR4030D-D10F	580	250	120	25	525	85	27	6	-	M5	10(5.5)
DR4050D-D10F	580	250	120	25	525	85	27	6	-	M6	8(8.0)
DR3010D-D00F	640	140	85	30	575	50	27	6	40	M5	12(3.5)
DR3020D-D00F	640	140	85	30	575	50	27	6	40	M5	12(3.5)
DR3030D-D00F	640	140	85	30	575	50	27	6	40	M5	10(5.5)
DR3050D-D00F	730	170	120	30	665	65	27	6	40	M6	6(13.5)
DR3100D-D00F	1250	300	250	30	1170	110	27×3	6	※	M8	(38.0)
DR4020D-D00F	800	230	110	25	745	85	27	6	-	M4	12(3.5)
DR4050D-D00F	880	250	120	25	825	85	27	6	-	M5	8(8.0)

额定电压 **500Vac**

型号	额定电流 (A)	测试电压	绝缘电阻	漏电流 max. at 500Vac 60Hz	使用温度范围 (°C)	衰减特性
DR3010D-D10F	10	线对接地 2,500Vdc 60sec	线对接地 1,000Vdc 100MΩ以上 60sec	0.43A	-20~+50	150kHz~18GHz 100dB
DR3020D-D10F	20					
DR3030D-D10F	30					
DR3050D-D10F	50					
DR3060D-D10F	60					
DR3100D-D10F	100					
DR4020D-D10F	20			3.0A		14kHz~18GHz 100dB
DR4030D-D10F	30					
DR4050D-D10F	50					
DR3010D-D00F	10			3.5A		
DR3020D-D00F	20					
DR3030D-D00F	30					
DR3050D-D00F	50			5.0A		
DR3100D-D00F	100					
DR4020D-D00F	20					
DR4050D-D00F	50					